

NAK07-187S · Kit installation


Application and kit contents

NAK07-187S · Ford Mustang V8, 4.6L, 5-speed, fifth generation, 2005-2010.

Includes pressure plate, damped disc, hydraulic release bearing, pilot bushing, shim and alignment tool. Inspect the clutch system and related components before, during and after installation.

5.2 mm shim: install between the hydraulic release bearing base and the transmission.

The shim compensates for the diaphragm-height difference between the original and NAMCCO pressure plates. It prevents release bearing overtravel, separation and fluid leakage. Install every supplied component for correct operation.

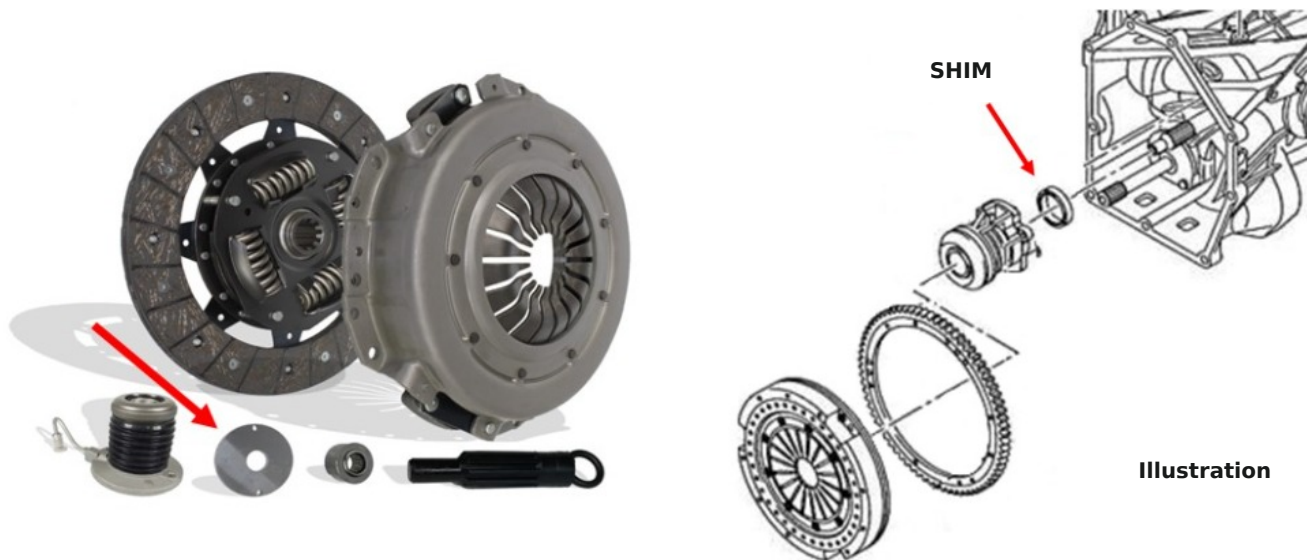

Left: kit components. Right: shim position between the release bearing and transmission.

Installation and warranty

If these instructions are ignored and the release bearing is submitted in a separated condition, the warranty claim will not be accepted because of incorrect installation.

Original identification: engine listed as "OVH".